
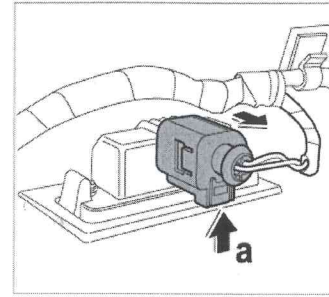


# LED Tail Plate Light Conversion



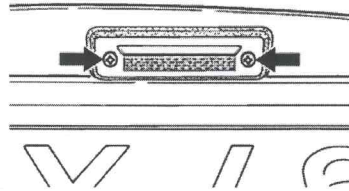


## Removal of the stock lens:

- Loosen both fastening screws and remove the plate light lens and bulb.
- Once the lens is gone, it's easier to pry the release clip with a small flat-headed screw driver. Use caution, and avoid damaging surrounding trim.
- Disconnect the light connector
- Remove the other side in the same manner
- Now, both plugs should be hanging free

## Installing the new light:

- The new light plug connector is in a new position (on the side of the light instead of the middle). Most cars have enough slack to accommodate the change.
- Plug in the new housing, and line up for installation. Depending on the slack available, you may have to do this one at a time.
- **Alignment!** These lights are directional, and have to be pointed in the correct direction. The plug socket should be on the left side, the assembly release clip is on the right side.
- In some rare cases, there may not be enough slack available. If this happens, you will have to gently pull the harness, or remove the bumper to release the harness further.

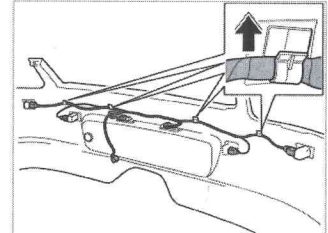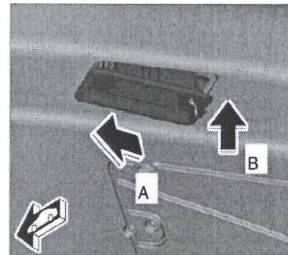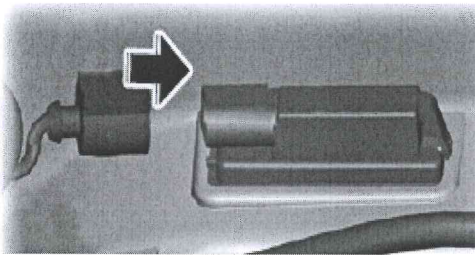

Note: If not enough slack is present, the harness will have to be released from the rear bumper clips. See photo three.

Professional installation advised, and install at your own risk. This guide is for reference only. Depending on model, actual installation may vary.